




TONNAGE CHANGE BASED ON HOT WATER AND COOLING WATER TEMPERATURES

45 F Chilled Water

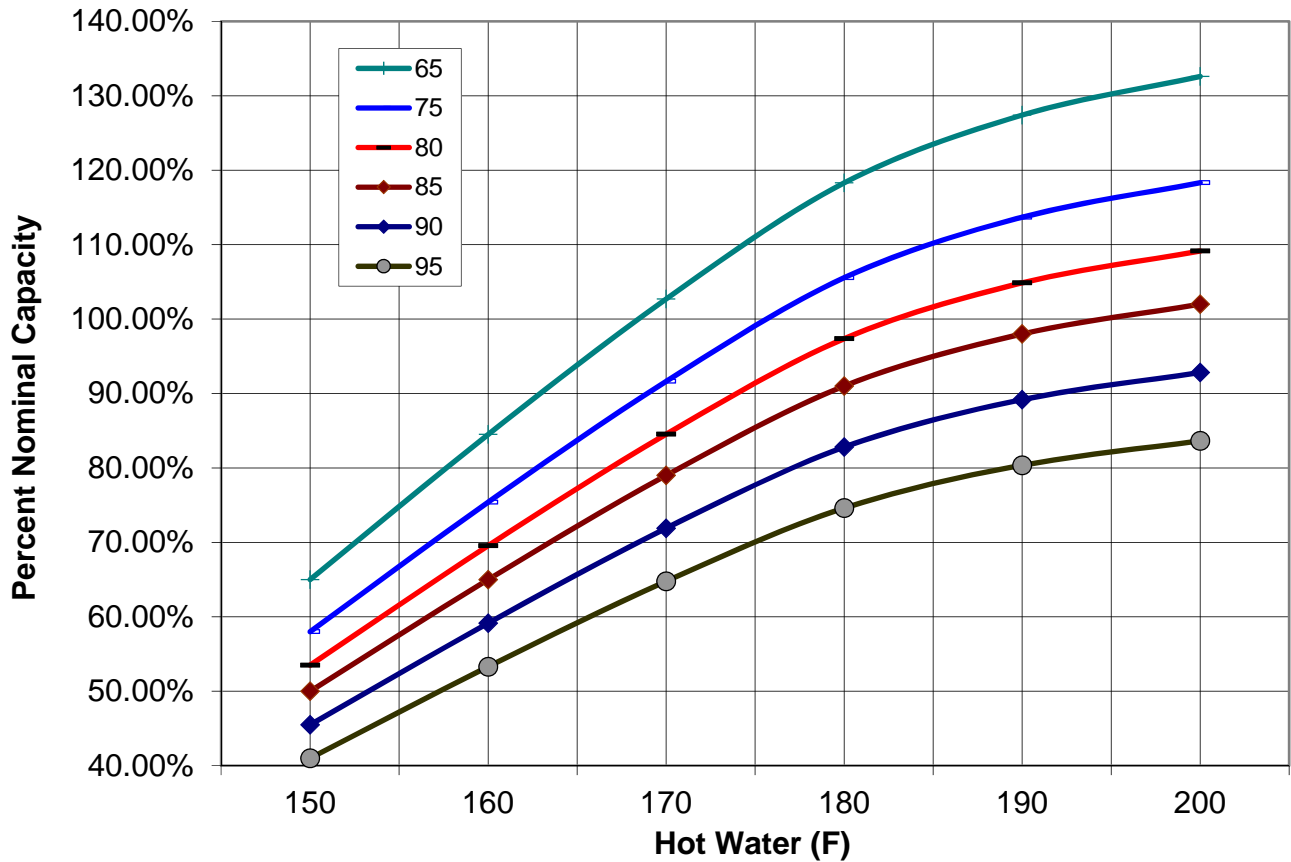

All data is for standard 45 F chilled water and maximum tonnage mode.

Percent of nominal tonnage at different operating conditions

Cooling Water Entering Temperatures (F)	Hot Water Entering Temperatures (F)								
	120	130	140	150	160	170	180	190	200
65	8%	14%	36%	65%	85%	103%	118%	127%	133%
75	7%	13%	32%	58%	75%	92%	106%	114%	118%
80	6%	12%	30%	54%	70%	85%	97%	105%	109%
85	6%	11%	28%	50%	65%	79%	91%	98%	102%
90	5%	10%	25%	46%	59%	72%	83%	89%	93%
95	5%	9%	23%	41%	53%	65%	75%	80%	84%
100	4%	8%	20%	35%	46%	55%	64%	69%	71%